

Type P163A and P164 Series Auxiliary Remote Release

Introduction

Type P163A or P164A Auxiliary Remote Release – These units allow the internal valve to be closed from a location other than the primary control point (Type P650 or P651). Pulling the auxiliary release handle trips the release mechanism on the primary control to close the internal valve.


The two assemblies are identical except for the length. Type P163A has an untrimmed length of 25 feet (7,6 m) and Type P164A has an untrimmed length of 50 feet (15,2 m). Both cables can be trimmed to any length. Both releases can be installed through mounting brackets up to 3/8-inch (9,5 mm) thick.

Type P164B — a release assembly that uses 50 ft (15 m) of cable housing which does not require elaborate guiding like uncovered cables.

Type P164C — an Auxiliary Remote Release without cable is also available.



TYPE P163A

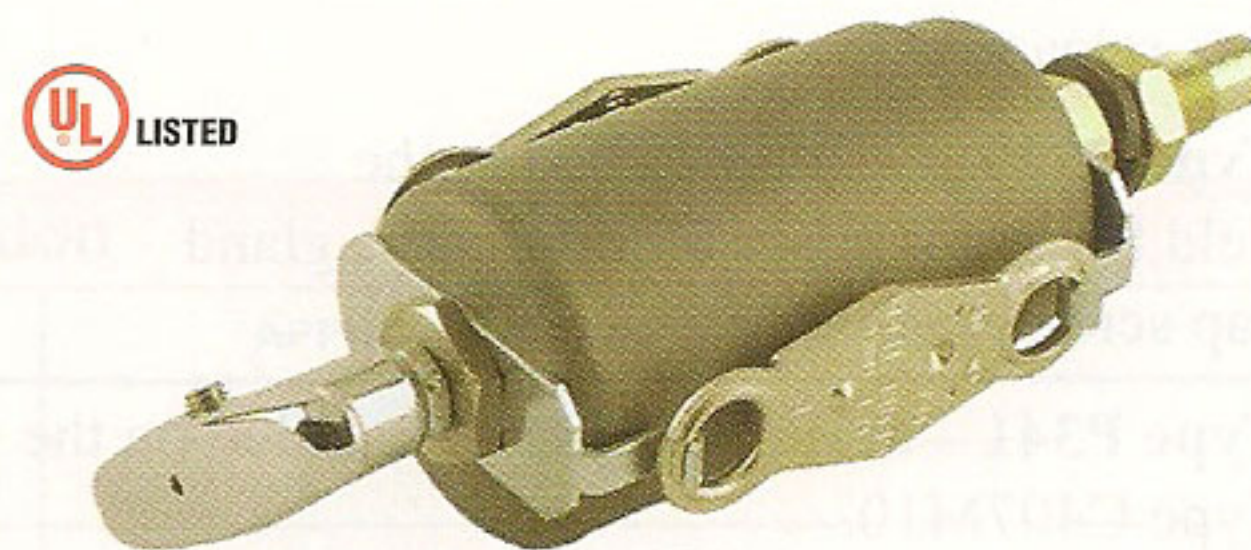

TYPE P164C

Auxiliary Remote Release Ordering Information		
TYPE NUMBER	AUXILIARY REMOTE RELEASE FOR:	LENGTH, FEET (m)
P163A	P650 or P651	25 (7,6)
P164A	P650 or P651	50 (15)
P164B	N550	50 (15)
P164C	----	No cable

T1139599012 4-Way Control Valve

Introduction

Fisher® makes available a control valve that can be used as primary control (open or close the ESV) or an auxiliary remote release (close only).

Placing the valve's button in the upward position permits pressure to the cylinder. Pushing the button down exhausts pressure to close all valves connected to the system.

4-Way Control Valve Ordering Information		
TYPE/PART NUMBER	TYPICAL USE	DESCRIPTION
T1139599012	Control double-acting cylinder or two single-acting on a selective basis	4-way push button valve

Ordering Guide

To order any of these products, refer to the Ordering Information tables above and specify the type number/s that satisfies your requirement. Then, contact or visit your local LP-Gas Equipment Distributor for availability or log on to:
www.emersonprocess.com/regulators/lp